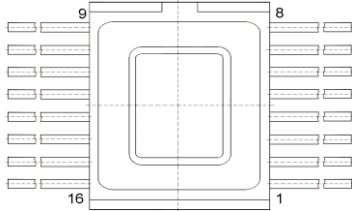



**TOP VIEW**

**BOTTOM VIEW**


Pin	Pin Destination
1	Noninverting input 2
2	Inverting input 2
3	-
4	Output 2
5	Output 3
6	-
7	Inverting input 3
8	Noninverting input 3
9	GND
10	Noninverting input 4
11	Inverting input 4
12	Output 4
13	Output 1
14	Inverting input 1
15	Noninverting input 1
16	Power $U_{CC1}$ ( plus )

**Electrical Characteristics**

Parameter	$T_A$	Min	Max	Units
Supply current, $I_{CC}$ $U_{CC+}=30V, U_{CC-}=0, R_L=10 k\Omega$	+22 ±3	-	3	mA
	-45( + 5-0)	-	4	
	+85(+0-3)	-	3	
Input Offset Voltage $U_{CC+}=30V, U_{CC-}=0$	+22 ±3	-2	2	mV
	-45( + 5-0)	-4	4	
	+85(+0-3)	-4	4	
Common Mode Rejection $U_{CC+}=30V, U_{CC-}=0, R_L=10 k\Omega$	+22 ±3	76		dB
	-45( + 5-0)	76		
	+85(+0-3)	76		

Microcircuits are manufactured under the supervision of the Quality Department, thoroughly inspected, and verified to correspond with the specifications.

An example of mounting a microcircuit on a board

